


MG-LED-051



Specification:

1.LED Quantity:63pcs 3030/24pcs 5050 /2×63pcs 3030/2×28pcs 5050	6.Color Temperature:2700-6500K	11.Installation pole dia:60/76MM
2.Power:30W/50W/60W/100W/120W	7.Color Rendering Index: > 70	12.Material: Die casting Aluminum Alloy
3.Input Voltage:100-240V/277V	8.LED Efficiency:120LM/W	13.Diffuser:Clear PC Lens
4.Frequency Range:50-60HZ	9.Luminous Flux:3600LM/6000LM /7200LM/12000LM/14400LM	14.IP Rate: IP66
5.Power Factor: > 0.9	10.Work Temperature:-30℃-60℃	15.Humidity:10%-90%
		16.LED Life: > 50000h

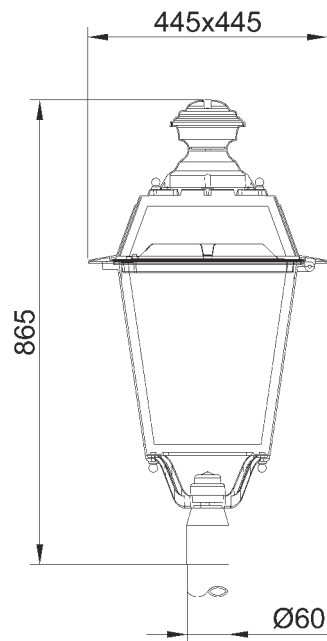