


MG-LED-002C

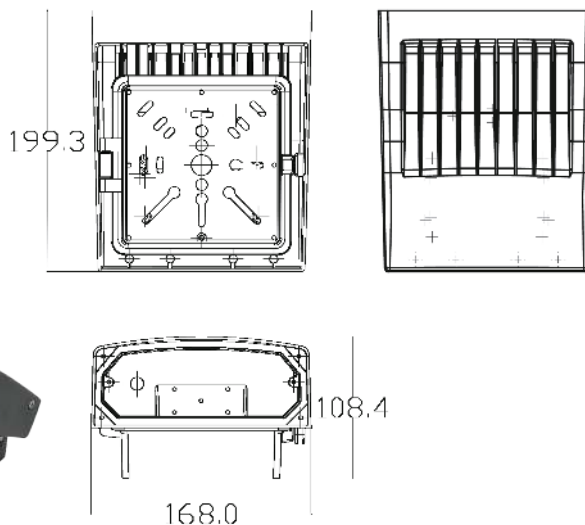


Specification:

- 1.LED Quantity:45pcs 3030
- 2.Power:20W/30W
- 3.Input Voltage:100-240V
- 4.Frequency Range:50-60HZ
- 5.Power Factor: > 0.9

- 6.Color Temperature:2700-6500K
- 7.Color Rendering Index: > 70
- 8.LED Efficiency:100LM/W
- 9.Luminous Flux:2000LM/3000LM
- 10.Material:Die casting aluminum alloy

- 11.IP Rate:IP65
- 12.Work Temperature:-30°C-60°C
- 13.Humidity:10%-90%
- 14.LED Life: > 50000h

DLWA-LED-002D

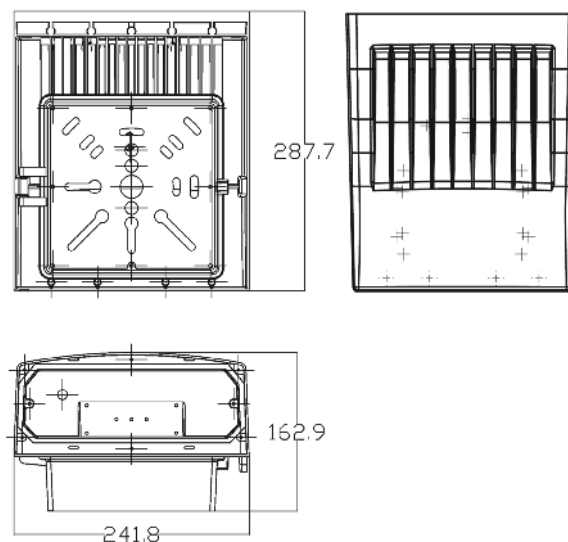

Specification:

- 1.LED Quantity:108pcs 3030
- 2.Power:60W/80W
- 3.Input Voltage:100-240V
- 4.Frequency Range:50-60HZ
- 5.Power Factor: > 0.9

- 6.Color Temperature:2700-6500K
- 7.Color Rendering Index: > 70
- 8.LED Efficiency:100LM/W
- 9.Luminous Flux:6000LM/8000LM
- 10.Material:Die casting aluminum alloy

- 11.IP Rate:IP65
- 12.Work Temperature:-30°C-60°C
- 13.Humidity:10%-90%
- 14.LED Life: > 50000h