


MG-LED-017A



GLASS




PC

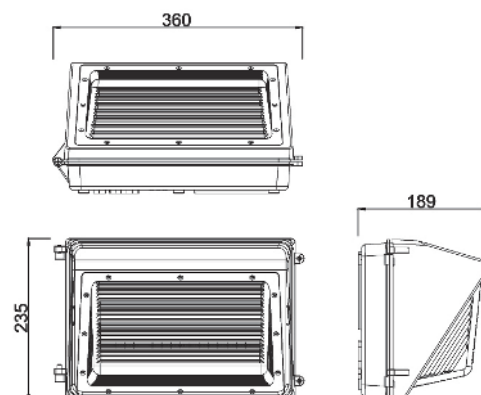

Specification:

1.LED Quantity:GLASS:60pcs /90pcs/132pcs 3030	4.Frequency Range:50-60HZ	10.Material:Die casting aluminum alloy
PC:45pcs/79pcs/102pcs	5.Power Factor: > 0.9	11.IP Rate:IP65
2.Power:GLASS:40W/60W/90W	6.Color Temperature:2700-6500K	12.Work Temperature:-30°C-60°C
PC:40W/60W/80W	7.Color Rendering Index: > 70	13.Humidity:10%-90%
3.Input Voltage:100-240V	8.LED Efficiency:100LM/W	14.LED Life: > 50000h
	9.Luminous Flux:4000LM/6000LM/8000LM	

DLWA-LED-017B

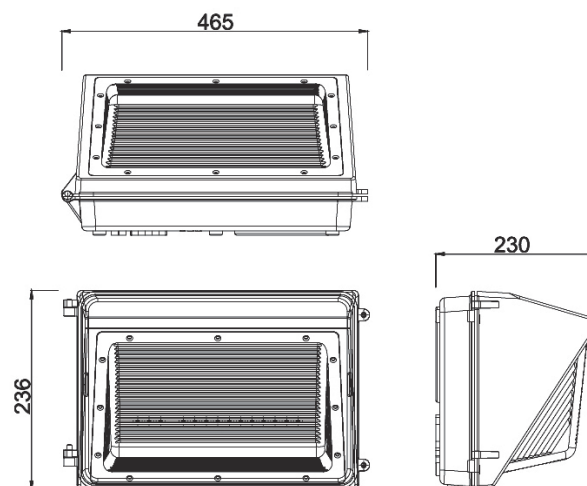

Specification:

1.LED Quantity:147pcs 3030	6.Color Temperature:2700-6500K	11.IP Rate:IP65
2.Power:100W/120W	7.Color Rendering Index: > 70	12.Work Temperature:-30°C-60°C
3.Input Voltage:100-240V	8.LED Efficiency:100LM/W	13.Humidity:10%-90%
4.Frequency Range:50-60HZ	9.Luminous Flux:10000LM/12000LM	14.LED Life: > 50000h
5.Power Factor: > 0.9	10.Material:Die casting aluminum alloy	