




LM-SL19


ENEC+ ENEC SAA CB CE ZD4i RoHS IP66 IK09

Professional Outdoor Lighting


MIGDAL-OR

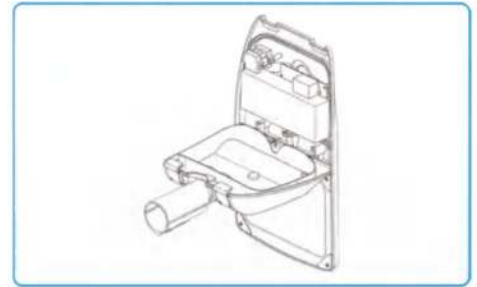

• Product Dimension

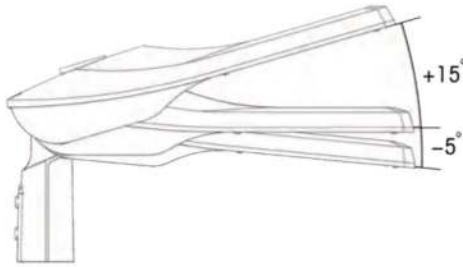

• Light Distribution Curve



• Technical Characteristics

Art No	LM-SL19-S	LM-SL19-M	LM-SL19-L
Size	570*247*111mm	655*292*115mm	756*292*115mm
Wattage	30-60W	80-150W	160-240W
Average Lumen	130-170lm/w	130-170lm/w	130-170lm/w
Lens Optic	Type I, II, III, IV, V	Type I, II, III, IV, V	Type I, II, III, IV, V
Chip Type	3030, 5050, 3535	3030, 5050, 3535	3030, 5050, 3535
Driver Brand	Meanwell, Philips	Meanwell, Philips	Meanwell, Philips
Power Factor	>0.96	>0.96	>0.96
Voltage	90-305Vac	90-305Vac	90-305Vac
Insulation Class	Class I, Class II	Class I, Class II	Class I, Class II
Kelvin	3000-6500K	3000-6500K	3000-6500K
CRI	>70Ra	>70Ra	>70Ra
Work Temperature	-40°C to 60°C	-40°C to 60°C	-40°C to 60°C
IP Level	IP66	IP66	IP66
Lifespan	>100,000H	>100,000H	>100,000H

Migdal-Or Lighting Engineering Ltd.

Tel: 04-8525244 Email: office@migdal-or.org
 Add: 18 Shlomo Ben Yosef St., Kiryat Ata, Israel
www.migdal-or.org